



Rolls and Rollers with Vulkollan®-coating



Wheels of steeling, ballbearing, circlip and **Vulkollan®**-covering

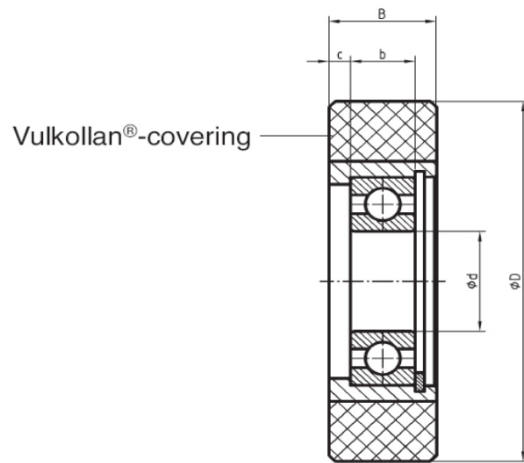

important properties:

- low sliding friction
- high structure capability of the material
- very quiet operation
- high load carrying capacity
- excellent abrasion and wear resistance
- good resistance to oil, UV radiation as well as ozon
- available in different hardnesses (on request)

Applications:

- rollers for conveyor units
- guide rollers for lifts and other applications
- castors for sliding guard doors
- rollers and castors for escalators

Standard range:

No.	Ø D (mm)	Ø d (mm)	B (mm)	b (mm)	c (mm)	bearing-size	max. load (dN) at V = 1,0 m/s	item No.
1	21,3	5	8	5	1,5	625-2RS	15	701554194*
2	32	8	12	7	2,5	608-ZZ	30	707513590
3	40	10	15	8	3,5	6000-ZZ	55	701700590
4	50	10	15	8	3,5	6000-ZZ	70	701701590
5	55	10	15	8	3,5	6000-ZZ	75	707202590
6	50	17	18	10	4	6003-ZZ	85	701702590
7	60	17	18	10	4	6003-ZZ	100	701703590
8	60	20	20	12	4	6004-ZZ	110	701704590
9	70	20	16	12	1,25	6004-ZZ	110	701705590
10	70	20	20	12	4	6004-ZZ	130	701706590
11	70	25	25	15	5	6205-ZZ	160	701707590
12	80	25	21	15	2,85	6205-ZZ	160	701708590
13	80	25	25	15	5	6205-ZZ	180	701709590
14	90	25	21	15	2,85	6205-ZZ	170	701710590
15	90	25	25	15	5	6205-ZZ	210	701711590
16	100	25	21	15	2,85	6205-ZZ	190	701712590
17	100	25	25	15	5	6205-ZZ	230	701713590
18	100	25	30	15	7,5	6205-ZZ	270	702567590
19	100	25	40	15	12,5	6205-ZZ	360	702568590
20	110	25	20	12	4	6005-ZZ	200	701714590
21	110	25	21	15	2,85	6205-ZZ	210	701715590
22	110	25	25	15	5	6205-ZZ	250	701716590
23	110	25	30	15	7,5	6205-ZZ	300	701717590
24	120	25	21	15	2,85	6205-ZZ	230	701718590
25	120	25	25	15	5	6205-ZZ	270	701719590
26	120	25	30	15	7,5	6205-ZZ	330	701720590
27	125	25	21	15	2,85	6205-ZZ	240	701721590
28	125	25	25	15	5	6205-ZZ	290	701722590
29	125	25	30	15	7,5	6205-ZZ	340	701723590
30	125	25	40	15	12,5	6205-ZZ	450	702570590
31	150	25	40	15	12,5	6205-ZZ	540	701740590
32	180	25	30	15	7,5	6205-ZZ	490	702602590

* Attention! Coating of this roller is made of TPU

ADVICE:

Load ranges you can find in our brochure, which is available in download-area.

P+S Polyurethan-Elastomere



P+S Polyurethan-Elastomere
GmbH & Co.KG

Kielweg 17
49393 Diepholz

telephone 05441 / 5980-0
telefax 05541 / 5980-88

e-mail: info@pus-polyurethan.de
homepage: www-pus-polyurethan.de