




P+S Lift buffers D55-series

Lift buffer types and certified load ranges

| Name | Buffer types | | Item-No. | Certified load ranges | | | |
|-------|-------------------------------|---------|-----------|------------------------|------------------------|------------------------|------------------------|
| | Dimensions Ø x height [mm] | Version | | v = 0,63 m/s | | v = 1,00 m/s | |
| | | | | m _{min.} [kg] | m _{max.} [kg] | m _{min.} [kg] | m _{max.} [kg] |
| D0-55 | 80 x 80 | type A | 211800075 | 160 | 2100 | 320 | 1200 |
| | | type C | 211800175 | | | | |
| | | type D | 211800775 | | | | |
| D2-55 | 100 x 80 | type A | 211802075 | 250 | 4200 | 500 | 2100 |
| | | type C | 211802175 | | | | |
| | | type D | 211802775 | | | | |
| D5-55 | 165 x 80 | type A | 211805075 | 600 | 7500 | 850 | 3800 |
| | | type C | 211805175 | | | | |
| | | type D | 211805775 | | | | |

Available versions / type of fixations

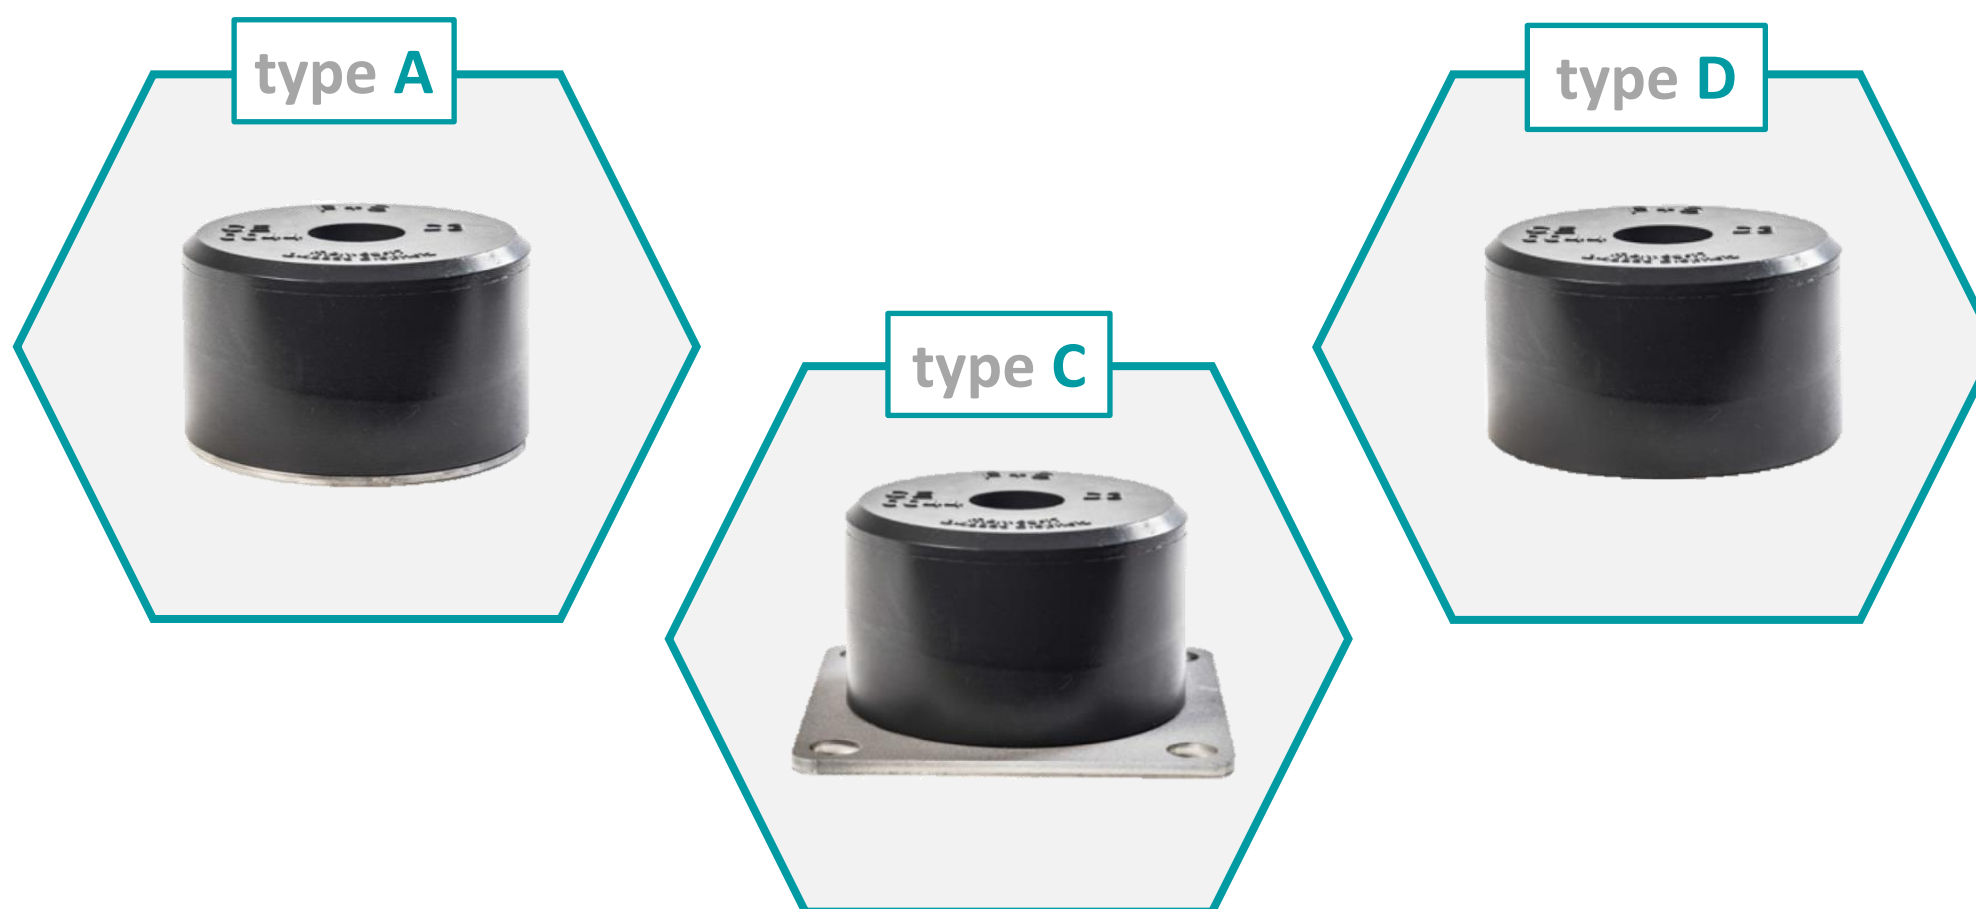

Certificates and corresponding engravings



P+S Lift buffers of the D-series are certified according to:

- EN 81 -20/-50 (Europe - except Great Britain)
- BS EN 81-20/50:2014 (UKCA) (Great Britain)

Corresponding certificates and declarations of conformity can be found here:

[DOWNLOAD - AREA](#)

REMARK: Certifications valid for further countries / areas (e.g. ASME) are also available and can be provided upon short notice.